



Standard Practices for Sampling Uranium-Ore Concentrate¹

This standard is issued under the fixed designation C1075; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope


1.1 These practices are intended to provide the nuclear industry with procedures for obtaining representative bulk samples from uranium-ore concentrates (UOC) (see Specification C967).

1.2 These practices also provide for obtaining a series of representative secondary samples from the original bulk sample for the determination of moisture and other test purposes, and for the preparation of pulverized analytical samples (see Test Methods C1022).

1.3 These practices consist of a number of alternative procedures for sampling and sample preparation which have been shown to be satisfactory through long experience in the nuclear industry. These procedures are described in the following order.

Stage	Procedure	Section
Primary Sampling	One-stage falling stream	4
	Two-stage falling stream	5
	Auger	6
Secondary Sampling	Straight-path (reciprocating)	7
	Rotating (Vezin)	8, 9
Sample Preparation		10
	Concurrent-drying	11 – 13
	Natural moisture	14 – 16
	Calcination	17, 18
Sample Packaging		19
	Wax sealing	20
	Vacuum sealing	21

1.3.1 The primary and secondary sampling stages can be organized in the following way:

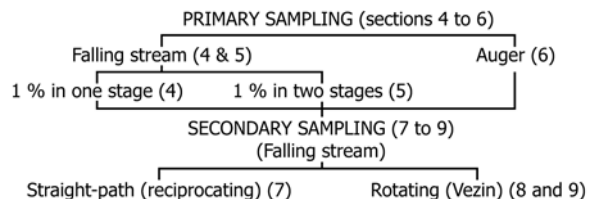

¹ These practices are under the jurisdiction of ASTM Committee C26 on Nuclear Fuel Cycle and are the direct responsibility of Subcommittee C26.02 on Fuel and Fertile Material Specifications.

Current edition approved Jan. 1, 2010. Published February 2010. Originally approved in 1986. Last previous edition approved in 2004 as C1075 – 93 (2004). DOI: 10.1520/C1075-10.

1.3.2 It is possible to combine the various elements of these stages in different ways to give satisfactory results depending on the agreed requirements of the contracting parties. For a given stage, however, each procedure must be regarded as a whole. It is highly inadvisable to mix elements belonging to different procedures.

1.4 These procedures do not include requirements for health, safety, and accountability. The observance of these practices does not relieve the user of the obligation to be aware of and to conform to all applicable international, federal, state, and local regulations pertaining to processing, shipping, or using uranium-ore concentrates. (Guidance is provided in CFR 10, Chapter 1.)

1.5 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

1.6 *This standard does not purport to address all of the safety problems, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

C967 Specification for Uranium Ore Concentrate
C1022 Test Methods for Chemical and Atomic Absorption Analysis of Uranium-Ore Concentrate

2.2 Other Document:

CFR 10 Nuclear Materials Licensing Code of Federal Regulations, Chapter 1³

3. General Requirements

3.1 Material Requirements:

3.1.1 The uranium-ore concentrates shall be free-flowing and of a particle size not to exceed 6 mm (0.25 in.) or such other limit agreed upon between contracting parties.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401, <http://www.access.gpo.gov>.