

Standard Test Method for Hail Impact Resistance of Aerospace Transparent Enclosures¹

This standard is issued under the fixed designation F 320; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

This standard has been approved for use by agencies of the Department of Defense.

1. Scope

1.1 This test method covers the determination of the impact resistance of an aerospace transparent enclosure, hereinafter called windshield, during hailstorm conditions using simulated hailstones consisting of ice balls molded under tightly controlled conditions.

1.2 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* For specific hazard statements see Section 7.

1.3 The values in inch-pound units are the preferred units. The values in parentheses are for information only.

2. Terminology

2.1 Definitions:

2.1.1 *damage*—any modification in visual properties or integrity of a windshield as a result of hail impact including scratches, crazing, delamination, cracks, or shattering.

2.1.2 *ice ball*—a frozen mass of water, with filler, that simulates a natural hailstone in weight, size, and toughness.

2.1.3 *impact angle*—the angle between the ice ball flight path and the target normal.

2.1.4 *sabot*—a plastic device for protecting the ice ball while in the launch tube. The sabot (see Fig. 1) consists of a split polycarbonate rod containing a central cavity for holding the ice ball. Each sabot half is designed to assure aerodynamic separation from the ice ball after ejection from the launch tube.

3. Summary of Test Method

3.1 The test method involves launching a series of ice balls of specified sizes at a sample windshield at a particular velocity and angle and in a specified pattern. Requirements are specified for the ice ball, test specimen, procedure, and data acquisition. The ice ball is photographed in flight to verify its integrity.

¹ This test method is under the jurisdiction of ASTM Committee F-7 on Aerospace and Aircraft and is the direct responsibility of Subcommittee F07.08 on Transparent Enclosures and Materials.

Current edition approved May 15, 1994. Published July 1994. Originally published as F 320 – 78. Last previous edition F 320 – 89.

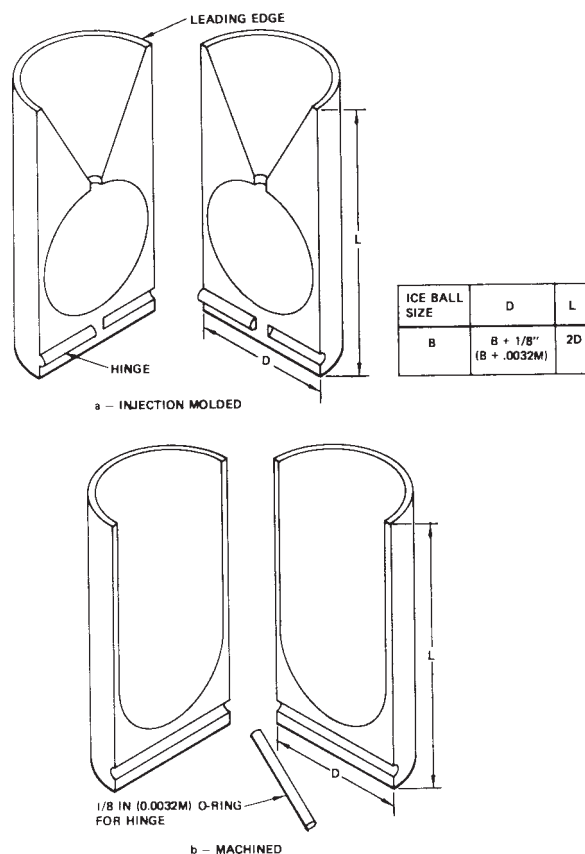


FIG. 1 Sabot Configuration

3.2 Requirements are specified for a particular apparatus and test procedure, but options are permitted for certain areas. However, it must be possible to demonstrate that the options used result in an ice ball at the test panel with the same size, consistency, and velocity as with the specified apparatus and procedure. Following are areas where options are allowed:

3.2.1 Ice Ball Mold Material.

3.2.2 *Launcher*—Any type of launcher is allowable as long as the iceball reaches the test specimen at the correct speed. The use of sabots and sabot material and geometry are optional.

3.2.3 Method of Determining Ice Ball Integrity.